

DC BRUSHLESS FAN




CC6010 SERIES

FEATURES

SIZE:	60x60x10 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	22.6(g)

PERFORMANCE & DIMENSIONS

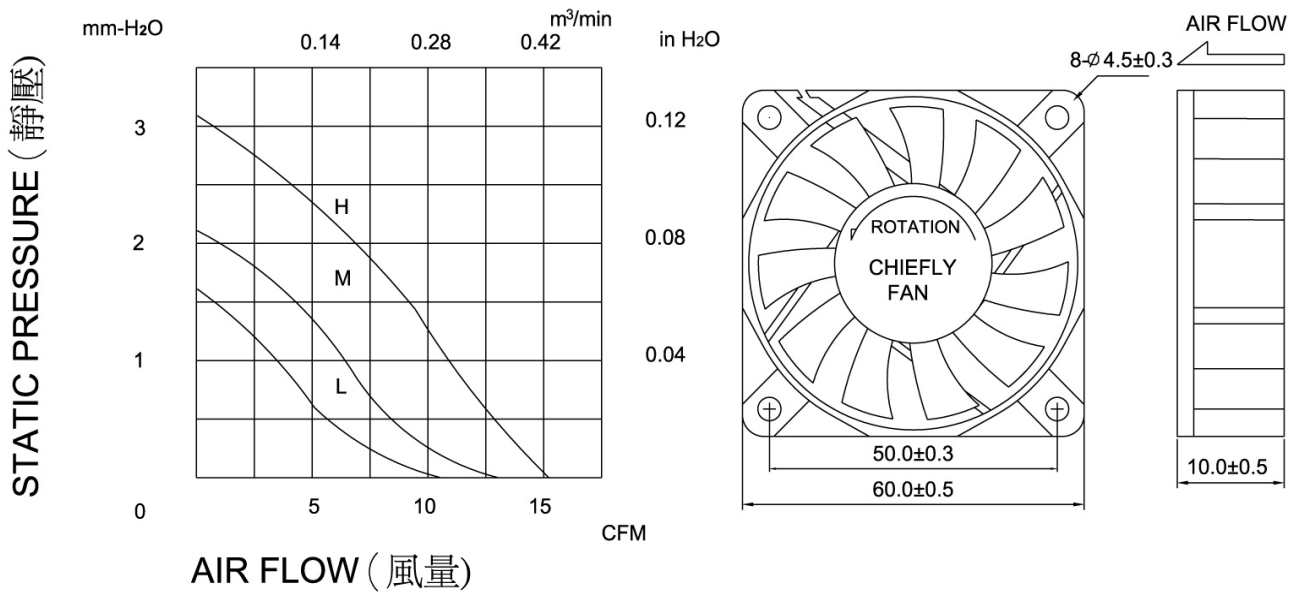

Model No.	Bearing	Rated Voltage (VAC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 6010S5H	Sleeve	5	15.15	0.30	1.50	4000	27.90	60x60x10	
CC 6010B5H	2Ball	5	15.15	0.30	1.50	4000	27.90		
CC 6010C5H	1B1S	5	15.15	0.30	1.50	4000	27.90		
CC 6010S12H	Sleeve	12	15.15	0.14	1.68	4000	27.90		
CC 6010B12H	2Ball	12	15.15	0.14	1.68	4000	27.90		
CC 6010C12H	1B1S	12	15.15	0.14	1.68	4000	27.90		
CC 6010S24H	Sleeve	24	15.15	0.12	2.88	4000	27.90		
CC 6010B24H	2Ball	24	15.15	0.12	2.88	4000	27.90		
CC 6010C24H	1B1S	24	15.15	0.12	2.88	4000	27.90		
CC 6010S5M	Sleeve	5	12.85	0.24	1.20	3400	24.30		
CC 6010B5M	2Ball	5	12.85	0.24	1.20	3400	24.30		
CC 6010C5M	1B1S	5	12.85	0.24	1.20	3400	24.30		
CC 6010S12M	Sleeve	12	12.85	0.11	1.32	3400	24.30		
CC 6010B12M	2Ball	12	12.85	0.11	1.32	3400	24.30		
CC 6010C12M	1B1S	12	12.85	0.11	1.32	3400	24.30		
CC 6010S24M	Sleeve	24	12.85	0.10	2.40	3400	24.30		
CC 6010B24M	2Ball	24	12.85	0.10	2.40	3400	24.30		
CC 6010C24M	1B1S	24	12.85	0.10	2.40	3400	24.30		
CC 6010S12L	Sleeve	12	10.48	0.08	0.96	2800	21.60		
CC 6010B12L	2Ball	12	10.48	0.08	0.96	2800	21.60		
CC 6010C12L	1B1S	12	10.48	0.08	0.96	2800	21.60		
CC 6010S5L	Sleeve	5	10.48	0.18	0.90	2800	21.60		
CC 6010B5L	2Ball	5	10.48	0.18	0.90	2800	21.60		
CC 6010C5L	1B1S	5	10.48	0.18	0.90	2800	21.60		
CC 6010S24L	Sleeve	24	10.48	0.08	1.92	2800	21.60		
CC 6010B24L	2Ball	24	10.48	0.08	1.92	2800	21.60		
CC 6010C24L	1B1S	24	10.48	0.08	1.92	2800	21.60		