

DC BRUSHLESS FAN




CC5010 SERIES

FEATURES

SIZE:	50x50x10 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	22(g)

PERFORMANCE & DIMENSIONS

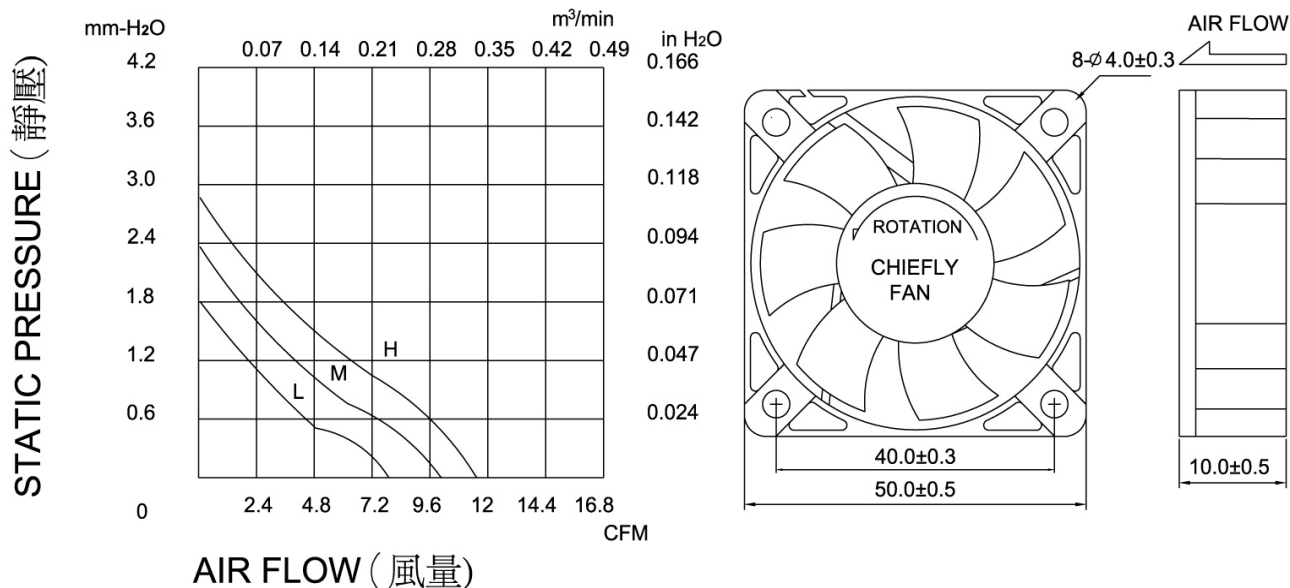

Model No.	Bearing	Rated Voltage (VAC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 5010S5H	Sleeve	5	11.37	0.30	1.50	5000	27.00	50x50x10	
CC 5010B5H	2Ball	5	11.37	0.30	1.50	5000	27.00		
CC 5010C5H	1B1S	5	11.37	0.30	1.50	5000	27.00		
CC 5010S12H	Sleeve	12	11.37	0.14	1.68	5000	27.00		
CC 5010B12H	2Ball	12	11.37	0.14	1.68	5000	27.00		
CC 5010C12H	1B1S	12	11.37	0.14	1.68	5000	27.00		
CC 5010S24H	Sleeve	24	11.37	0.12	2.88	5000	27.00		
CC 5010B24H	2Ball	24	11.37	0.12	2.88	5000	27.00		
CC 5010C24H	1B1S	24	11.37	0.12	2.88	5000	27.00		
CC 5010S5M	Sleeve	5	9.73	0.24	1.20	4200	23.40		
CC 5010B5M	2Ball	5	9.73	0.24	1.20	4200	23.40		
CC 5010C5M	1B1S	5	9.73	0.24	1.20	4200	23.40		
CC 5010S12M	Sleeve	12	9.73	0.11	1.32	4200	23.40		
CC 5010B12M	2Ball	12	9.73	0.11	1.32	4200	23.40		
CC 5010C12M	1B1S	12	9.73	0.11	1.32	4200	23.40		
CC 5010S24M	Sleeve	24	9.73	0.10	2.40	4200	23.40		
CC 5010B24M	2Ball	24	9.73	0.10	2.40	4200	23.40		
CC 5010C24M	1B1S	24	9.73	0.10	2.40	4200	23.40		
CC 5010S12L	Sleeve	12	7.66	0.08	0.96	3400	20.70		
CC 5010B12L	2Ball	12	7.66	0.08	0.96	3400	20.70		
CC 5010C12L	1B1S	12	7.66	0.08	0.96	3400	20.70		
CC 5010S5L	Sleeve	5	7.66	0.18	0.90	3400	20.70		
CC 5010B5L	2Ball	5	7.66	0.18	0.90	3400	20.70		
CC 5010C5L	1B1S	5	7.66	0.18	0.90	3400	20.70		
CC 5010S24L	Sleeve	24	7.66	0.08	1.92	3400	20.70		
CC 5010B24L	2Ball	24	7.66	0.08	1.92	3400	20.70		
CC 5010C24L	1B1S	24	7.66	0.08	1.92	3400	20.70		