

DC BRUSHLESS FAN




CC-2510 SERIES

FEATURES

SIZE:	25x25x10 mm
BEARING TYPE:	BALL BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	7(g)

PERFORMANCE & DIMENSIONS

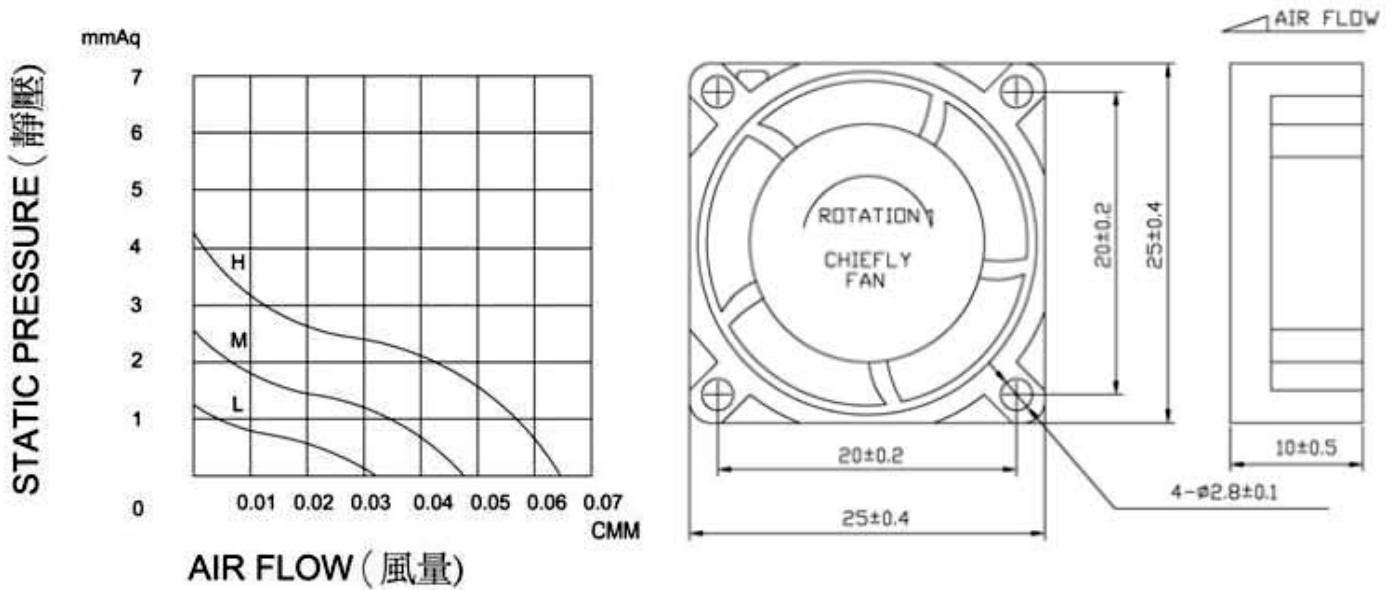

Model No.	Bearing	Rated Voltage (VDC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 2510S5H	Sleeve	5	2.85	0.13	1.10	13000	29.55	25x25x10	
CC 2510B5H	2Ball	5	2.85	0.12	1.00	13000	30.26		
CC 2510C5H	1B1S	5	2.85	0.13	1.00	13000	30.26		
CC 2510S12H	Sleeve	12	2.85	0.22	1.50	13000	29.55		
CC 2510B12H	2Ball	12	2.85	0.20	1.40	13000	30.26		
CC 2510C12H	1B1S	12	2.85	0.20	1.60	13000	30.26		
CC 2510S5M	Sleeve	5	2.17	0.20	1.00	10000	24.61		
CC 2510B5M	2Ball	5	2.17	0.16	0.90	10000	24.76		
CC 2510C5M	1B1S	5	2.17	0.16	0.90	10000	24.76		
CC 2510S12M	Sleeve	12	2.17	0.11	1.30	10000	24.61		
CC 2510B12M	2Ball	12	2.17	0.07	0.80	10000	24.76		
CC 2510C12M	1B1S	12	2.17	0.07	0.80	10000	24.76		
CC 2510S5L	Sleeve	5	1.52	0.14	0.70	7000	19.35		
CC 2510B5L	2Ball	5	1.52	0.10	0.50	7000	19.47		
CC 2510C5L	1B1S	5	1.52	0.10	0.50	7000	19.47		
CC 2510S12L	Sleeve	12	1.52	0.10	1.20	7000	19.35		
CC 2510B12L	2Ball	12	1.52	0.06	0.70	7000	19.47		
CC 2510C12L	1B1S	12	1.52	0.06	0.70	7000	19.47		