


DC MODULE FAN

CCD-4510 SERIES

FEATURES

SIZE:	45×45×10 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	9(g)

DIMENSIONS

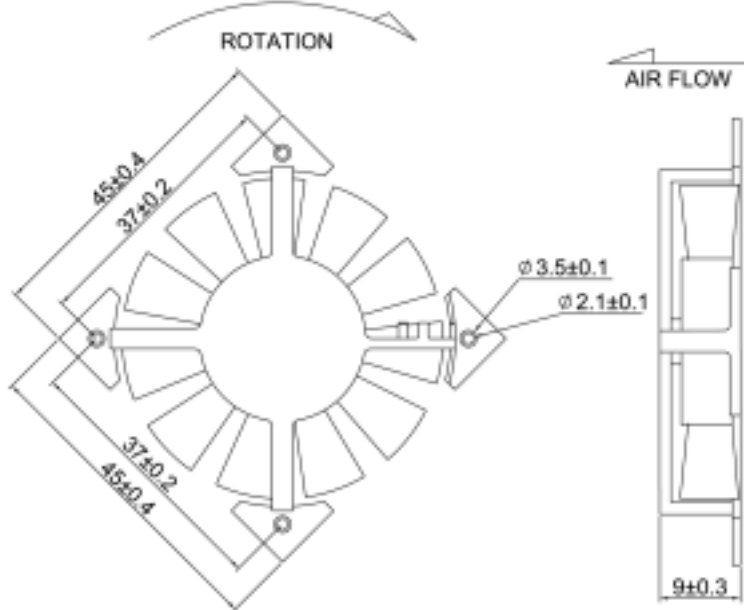

Model No.	Bearing	Rated Voltage (VDC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								L×W×H (mm)	(mm)
CCD 4510S5H	Sleeve	5	11.35	0.38	1.90	5400	31.40	45×45×10	
CCD 4510B5H	2Ball	5	11.35	0.38	1.90	5400	31.40		
CCD 4510C5H	1B1S	5	11.35	0.38	1.90	5400	31.40		
CCD 4510S12H	Sleeve	12	11.35	0.23	2.76	5400	31.40		
CCD 4510B12H	2Ball	12	11.35	0.23	2.76	5400	31.40		
CCD 4510C12H	1B1S	12	11.35	0.23	2.76	5400	31.40		
CCD 4510S24H	Sleeve	24	11.35	0.14	3.36	5400	31.40		
CCD 4510B24H	2Ball	24	11.35	0.14	3.36	5400	31.40		
CCD 4510C24H	1B1S	24	11.35	0.14	3.36	5400	31.40		
CCD 4510S5M	Sleeve	5	8.42	0.28	1.40	4600	28.50		
CCD 4510B5M	2Ball	5	8.42	0.28	1.40	4600	28.50		
CCD 4510C5M	1B1S	5	8.42	0.28	1.40	4600	28.50		
CCD 4510S12M	Sleeve	12	8.42	0.15	1.80	4600	28.50		
CCD 4510B12M	2Ball	12	8.42	0.15	1.80	4600	28.50		
CCD 4510C12M	1B1S	12	8.42	0.15	1.80	4600	28.50		
CCD 4510S24M	Sleeve	24	8.42	0.11	2.64	4600	28.50		
CCD 4510B24M	2Ball	24	8.42	0.11	2.64	4600	28.50		
CCD 4510C24M	1B1S	24	8.42	0.11	2.64	4600	28.50		
CCD 4510S5L	Sleeve	5	6.95	0.18	0.90	3800	24.70		
CCD 4510B5L	2Ball	5	6.95	0.18	0.90	3800	24.70		
CCD 4510C5L	1B1S	5	6.95	0.18	0.90	3800	24.70		
CCD 4510S12L	Sleeve	12	6.95	0.10	1.20	3800	24.70		
CCD 4510B12L	2Ball	12	6.95	0.10	1.20	3800	24.70		
CCD 4510C12L	1B1S	12	6.95	0.10	1.20	3800	24.70		
CCD 4510S24L	Sleeve	24	6.95	0.08	1.92	3800	24.70		
CCD 4510B24L	2Ball	24	6.95	0.08	1.92	3800	24.70		
CCD 4510C24L	1B1S	24	6.95	0.08	1.92	3800	24.70		