

DC BRUSHLESS FAN




CC-12025 SERIES

FEATURES

SIZE:	120x120x25 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	164(g)

PERFORMANCE & DIMENSIONS

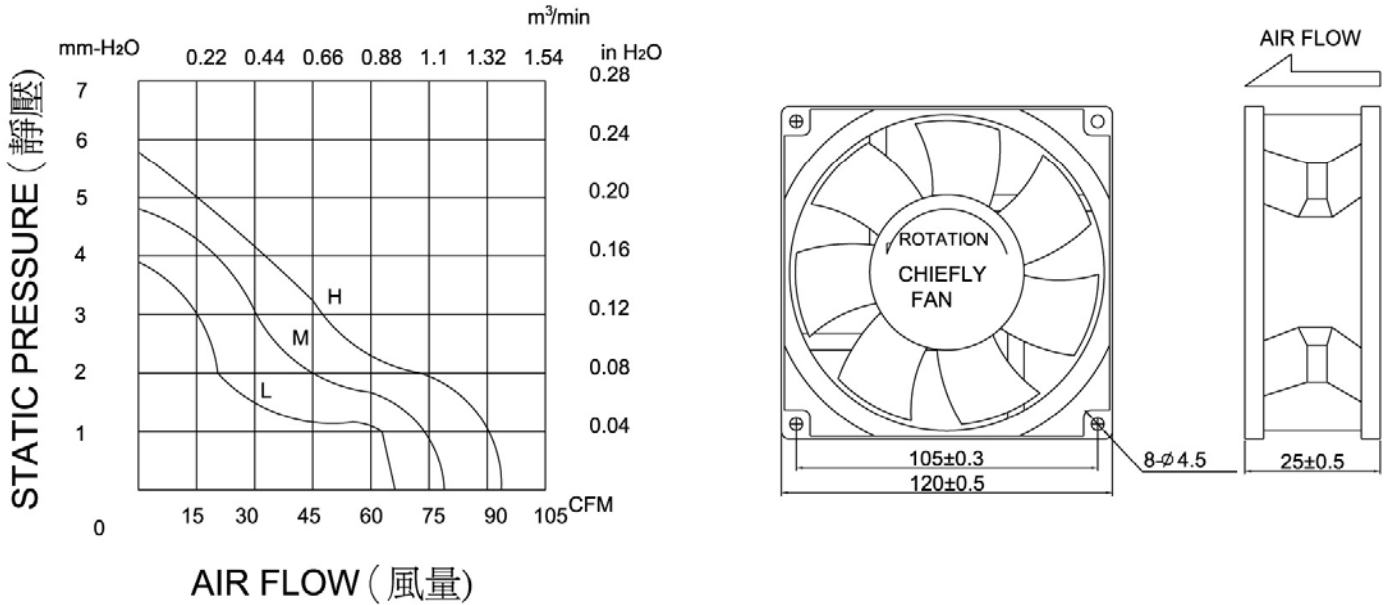

Model No.	Bearing	Rated Voltage (VDC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								LxWxH (mm)	
CC 12025S12H	Sleeve	12	88	0.36	4.32	3000	45	120x120x25	
CC 12025B12H	2Ball	12	88	0.36	4.32	3000	45		
CC 12025C12H	1B1S	12	88	0.36	4.32	3000	45		
CC 12025S24H	Sleeve	24	88	0.24	5.76	3000	45		
CC 12025B24H	2Ball	24	88	0.24	5.76	3000	45		
CC 12025C24H	1B1S	24	88	0.24	5.76	3000	45		
CC 12025S48H	Sleeve	48	82	0.10	4.80	2400	41.1		
CC 12025B48H	2Ball	48	82	0.10	4.80	2400	41.1		
CC 12025C48H	1B1S	48	82	0.10	4.80	2400	41.1		
CC 12025S12M	Sleeve	12	75	0.25	3.00	2500	42		
CC 12025B12M	2Ball	12	75	0.25	3.00	2500	42		
CC 12025C12M	1B1S	12	75	0.25	3.00	2500	42		
CC 12025S24M	Sleeve	24	75	0.18	4.32	2500	42		
CC 12025B24M	2Ball	24	75	0.18	4.32	2500	42		
CC 12025C24M	1B1S	24	75	0.18	4.32	2500	42		
CC 12025S48M	Sleeve	48	73	0.08	3.84	2100	37.3		
CC 12025B48M	2Ball	48	73	0.08	3.84	2100	37.3		
CC 12025C48M	1B1S	48	73	0.08	3.84	2100	37.3		
CC 12025S12L	Sleeve	12	62	0.14	1.68	2000	25		
CC 12025B12L	2Ball	12	62	0.14	1.68	2000	25		
CC 12025C12L	1B1S	12	62	0.14	1.68	2000	25		
CC 12025S24L	Sleeve	24	62	0.10	2.40	2000	25		
CC 12025B24L	2Ball	24	62	0.10	2.40	2000	25		
CC 12025C24L	1B1S	24	62	0.10	2.40	2000	25		
CC 12025S48L	Sleeve	48	61	0.06	2.88	1800	33.1		
CC 12025B48L	2Ball	48	61	0.06	2.88	1800	33.1		
CC 12025C48L	1B1S	48	61	0.06	2.88	1800	33.1		