

# DC BRUSHLESS FAN





## CC8020 SERIES

### FEATURES

SIZE:	80×80×20 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	90(g)

### PERFORMANCE & DIMENSIONS

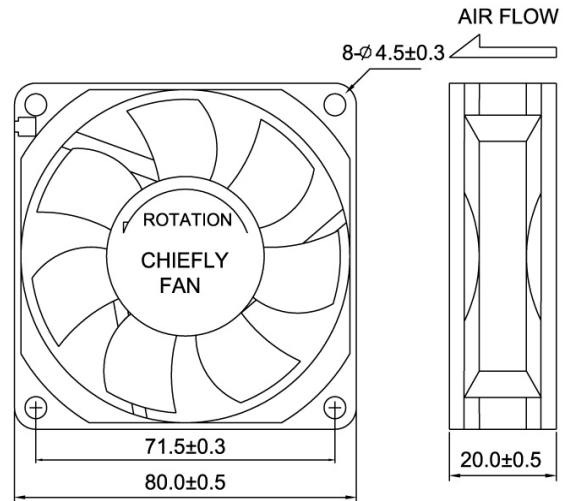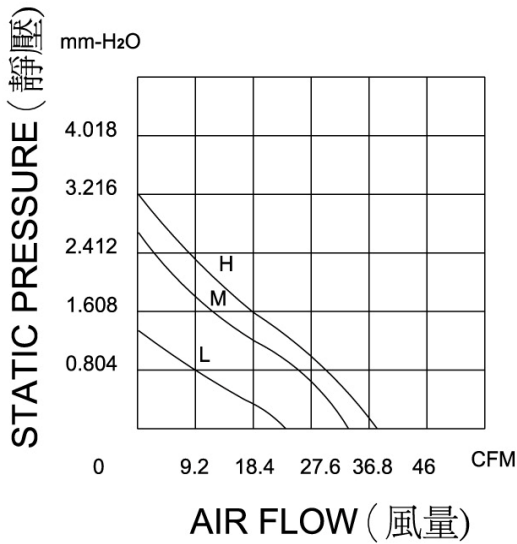

Model No.	Bearing	Rated Voltage (VAC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions	
								L×W×H (mm)	
CC 8020S5H	Sleeve	5	27.3	0.40	5.16	3000	31.4	80×80×20	
CC 8020B5H	2Ball	5	27.3	0.40	5.16	3000	31.4		
CC 8020C5H	1B1S	5	27.3	0.40	5.16	3000	31.4		
CC 8020S12H	Sleeve	12	32.21	0.22	2.64	2800	29		
CC 8020B12H	2Ball	12	32.21	0.22	2.64	2800	29		
CC 8020C12H	1B1S	12	32.21	0.22	2.64	2800	29		
CC 8020S24H	Sleeve	24	27.3	0.15	3.60	3000	31.4		
CC 8020B24H	2Ball	24	27.3	0.15	3.60	3000	31.4		
CC 8020C24H	1B1S	24	27.3	0.15	3.60	3000	31.4		
CC 8020S12M	Sleeve	12	27.62	0.18	2.16	2400	26.5		
CC 8020B12M	2Ball	12	27.62	0.18	2.16	2400	26.5		
CC 8020C12M	1B1S	12	27.62	0.18	2.16	2400	26.5		
CC 8020S24M	Sleeve	24	22.1	0.13	3.12	2400	25.4		
CC 8020B24M	2Ball	24	22.1	0.13	3.12	2400	25.4		
CC 8020C24M	1B1S	24	22.1	0.13	3.12	2400	25.4		
CC 8020S12L	Sleeve	12	24.16	0.16	1.92	2100	23		
CC 8020B12L	2Ball	12	24.16	0.16	1.92	2100	23		
CC 8020C12L	1B1S	12	24.16	0.16	1.92	2100	23		