


DC MODULE FAN

CCD-3010 SERIES

FEATURES

SIZE:	30x30x10 mm
BEARING TYPE:	BALL , SLEEVE & ONE BALL & ONE SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
WEIGHT:	6(g)

DIMENSIONS

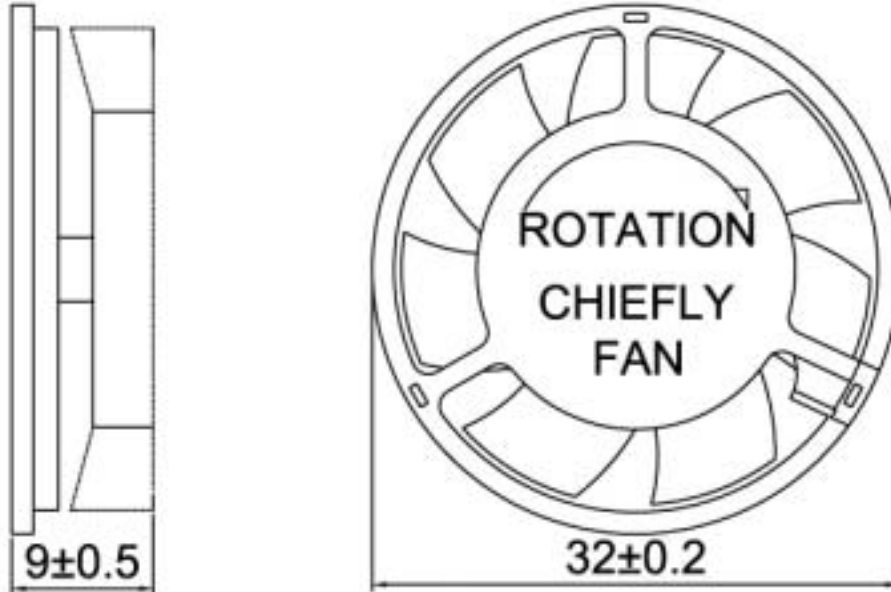

Model No.	Bearing	Rated Voltage (VDC)	Air Flow (CFM)	Current (A)	Input Power (Watts)	Speed (RPM)	Noise Level (dBA)	Dimensions
								LxWxH (mm)
CCD 3010S3H	Sleeve	3.3	4.43	0.30	0.99	11000	29.70	30x30x10
CCD 3010B3H	2Ball	3.3	4.43	0.30	0.99	11000	29.70	
CCD 3010C3H	1B1S	3.3	4.43	0.30	0.99	11000	29.70	
CCD 3010S5H	Sleeve	5	4.43	0.20	1.00	11000	29.70	
CCD 3010B5H	2Ball	5	4.43	0.20	1.00	11000	29.70	
CCD 3010C5H	1B1S	5	4.43	0.20	1.00	11000	29.70	
CCD 3010S12H	Sleeve	12	4.43	0.14	1.68	11000	29.70	
CCD 3010B12H	2Ball	12	4.43	0.14	1.68	11000	29.70	
CCD 3010C12H	1B1S	12	4.43	0.14	1.68	11000	29.70	
CCD 3010S3M	Sleeve	3.3	3.30	0.24	0.79	8500	26.00	
CCD 3010B3M	2Ball	3.3	3.30	0.24	0.79	8500	26.00	
CCD 3010C3M	1B1S	3.3	3.30	0.24	0.79	8500	26.00	
CCD 3010S5M	Sleeve	5	3.30	0.17	0.85	8500	26.00	
CCD 3010B5M	2Ball	5	3.30	0.17	0.85	8500	26.00	
CCD 3010C5M	1B1S	5	3.30	0.17	0.85	8500	26.00	
CCD 3010S12M	Sleeve	12	3.30	0.11	1.32	8500	26.00	
CCD 3010B12M	2Ball	12	3.30	0.11	1.32	8500	26.00	
CCD 3010C12M	1B1S	12	3.30	0.11	1.32	8500	26.00	
CCD 3010S3L	Sleeve	3.3	2.25	0.18	0.59	6000	18.90	
CCD 3010B3L	2Ball	3.3	2.25	0.18	0.59	6000	18.90	
CCD 3010C3L	1B1S	3.3	2.25	0.18	0.59	6000	18.90	
CCD 3010S5L	Sleeve	5	2.25	0.14	0.70	6000	18.90	
CCD 3010B5L	2Ball	5	2.25	0.14	0.70	6000	18.90	
CCD 3010C5L	1B1S	5	2.25	0.14	0.70	6000	18.90	
CCD 3010S12L	Sleeve	12	2.25	0.08	0.96	6000	18.90	
CCD 3010B12L	2Ball	12	2.25	0.08	0.96	6000	18.90	
CCD 3010C12L	1B1S	12	2.25	0.08	0.96	6000	18.90	